

Visit us at: www.godrejsecure.com E-mail: securityexports@godrej.com

Godrej & Boyce Mfg. Co. Ltd.

The contents and information on the catalogue is for general purposes and is provided on an "as is" basis. The recommendations of level of strength are relative and completely depend on the nature of tools used for any attack. All safes can be broken open given sufficient time, tools, torch (basic or simple home tools), expert skill and access. All warranties, recommendations and representations of any kind are disclaimed, including the implied warranties of merchantability and fitness for a particular use. The company disclaims any claims, losses, demands or damages of any kind whatsoever including but not limited to direct, indirect, incidental, or consequential loss or damages, economic loss, or otherwise arising out of or resulting by reason or in consequence of any breaking open of any safes, video door phones, burglar alarm systems, or any theft, fire, robbery, fraud or other wrongful act done by any party with regard to safes, video door phones, burglar alarm systems. The specifications, prices and features of the product may be subject to change. The categorization of safes into 10X, 100X, and 250X signifies the relative strength and security of each safe compared to a standard wooden cupboard. This categorization is based on controlled in-house testing. We are certified under ISO 9001:2015, ISO 14001:2015, and ISO 45001:2018, demonstrating our commitment to quality, environmental responsibility, and occupational health and safety.

Be Intelligent, Be Safe

TABLE OF CONTENTS

•	Foreword	
•	Choosing Your Godrej Safe	2
•	Fire & Burglary Resistant Safes & Vaults (High Security)	3
	Demountable Vaults & Strong Room Doors	
	Defender Pro - Grade 0	
	Defender Pro - Grade I	
	Defender Pro - Grade II	
	Defender Pro - Grade III	12-13
	Defender Pro - Grade IV CD	
	Defender Pro - Grade V CD	
	Eurocash - Grade III	
	Eurocash - Grade IV	
	Eurocash - Grade V	
	Eurocash - Grade VI CD Euro Cash Gun Safes - Grade 0 / I / II / III.	24-25
	Euro Cash Gun Sales - Grade 0 / 1 / 11 / 111. Transfer Safe	
	Depository Safes (High Security)	
	Depository Safe - Grade 'D-I'	
	Depository Safe - Grade 'D-II' Depository Safe - Grade 'D-II'	
	Depository Safe - Grade 'D-III'	
	Depository Safe - Grade 'D-V'	
	EN1143-1, T2 Product Testing Images	
•	Bespoke Solutions - Certified Security	42-43
•	Fire & Burglary Resistant Safes (Moderate Security)	45
	Eurolite Safes - VDMA B Series	
	Eurolite Safes - S2 Series	
	Eurolite Pro Safes - S2, 30-P Series	
	Defender Pro - 0 Series - S2, 60-P	52-53
•	Fire Resistant Cabinets (Moderate Security)	55
	Document Safes - FR Series Fig. Politics Filling Cabinat - FREC COR Filling Cabinat -	
	 Fire Resisting Filing Cabinet - FRFC 60P Fire Resisting Filing Cabinet - FRFC 90P 	
	Fire Resisting Filing Cabinet - FRFC 90P Fire Resisting Filing Cabinet - FRFC 120P	
	Data Cabinets - Dataline Series	
	NX Pro Range	
	Electronic Lock	
	Lock Options	
	Accessories & Glossary	70

FOREWORD

Thank you for choosing Godrej as your security partner!

It has been our constant endeavour to provide our customers with certified security. Godrej has partnered with several certification agencies globally to provide you with unmatched security.

Our certification partners include VdS & ECB.S in Germany, CNPP in France, LPCB in the UK, UL in the USA, RISE Research Institute in Sweden and SABS in South Africa.

With more than 100 years of experience in the security equipment business, we have learnt to build trust and reliability. We do understand that the real test of a product is its resilience to successfully repel a real life attack. Godrej's security equipment has time and again proved its remarkable ability to resist and protect your valuables, when all other security measures have failed. As we reminisce our history, we have several such incidents on record - be it the unsuccessful burglary attempt in a private household in Essen, or the attack and looting attempt on a private property in Kuwait during the Gulf war, or a failed attempt in a famous food-chain outlet in London - our products have shown remarkable character and have proved one thing - they are very stubborn when it comes to an unauthorised and forced access!

Godrej has also been accredited with the Integrated Management System certification, which encompasses an ISO 9001:2008, ISO 14001:2004 & BS OHSAS 18001:2007 (Operational Health & Safety Assessment Series) - thus committing delivery of standard products under pre-defined quality and safety procedures, which are being continuously monitored and assessed by Internal & External audits.

Apart from being manufacturers of quality products, Godrej is renowned for its ethical business practices and its concern for environmental and social welfare.

We look forward to your support for our mission of "Securing Peace of Mind, at Home and at Work".



CHOOSING YOUR GODREJ SAFE

There are 4 steps to select the right safe for your home, business or organisation.

1 GRADE

Safes vary not only in size but also in the degree of protection they offer against attacks. This is the GRADE. Each GRADE is awarded an OVERNIGHT CASH RATING by insurance companies. The recommended rating for Godrej Safes are shown for each range. The rating for jewellery and valuables is up to 10 X CASH RATING. The recommended ratings are those normally awarded but it is important that you check with your insurance company or broker since the type of premises, location and other security measures may make a difference.

2 SIZE

In each grade there are various sizes. Choose the size you need. You should also consider the location of the safe and its weight.

3 LOCKING OPTIONS

All Godrej Safes come with keylock as standard. The two most popular options are dial or digital combination lock.

4 OPTIONAL EXTRAS

Consider what you wish to protect inside the safe. All Godrej Safes come with adjustable/removable shelves. Other options include

- Lockable Drawers
- Lockable Cupboards
- Extra Shelves
- Deposit Features

CASH, JEWELLERY, VALUABLES AND FIRE RATING





These icons help you to choose the right grade of safe.



The fire protection rating is indicated by the fire icon.

INDEPENDENT CERTIFICATION AND TESTING

Every Godrej safe is independently tested and certified. Every safe carries the appropriate badge.














FIRE & BURGLARY RESISTANT SAFES & VAULTS



EN 1143 - 1

STANDARDS FOR FREE STANDING SAFES, ATM SAFES, STRONG ROOM DOORS & STRONG ROOMS

Secure storage units are the last line of defense in any security architecture. A poorly designed or an untested/uncertified storage unit poses a very high risk for the security of your valuables. The EN 1143-1 standards have been specially designed to replicate and test various forms of torch, tool and explosive attacks on a secure storage unit. Apart from being a very practical and scientific approach of ensuring the security of the product design, these tests and standards have evolved over the years to simulate real life conditions of forced entry into a secure storage unit.

All certified secure storage units adhering to the European norms must conform to the EN 1143-1 standards.

DEMOUNTABLE VAULTS & STRONG ROOM DOORS - THE DEFENDER PRO SERIES











CERTIFIED SECURITY EN1143-I, GRADES V - EX / VI - EX / VII - EX / VIII - CD,EX / IX CD,EX / X - CD,EX / XI - CD,EX / XII - CD,EX / XIII - CD,EX

EN1143-1, T2 OPTION FOR ALL GRADES

Compact & Modular:

The Modular construction of the Strong Rooms offer a compact solution for a room-in-room system, which can be installed in existing rooms, by means of dry construction techniques. The system also offers portability and flexibility to remove and re-use at a later date. The compact walls also ensure better space utilisation and therefore, an attractive option for providing high security to your valuables.

Ultra High Certified Security :

The Strong Room elements and doors are subjected to rigorous test attacks using a combination of Mechanical Tools, Power Tools, Torches, Thermic Lances, Diamond Core Drills, Solid Explosives etc., and assure you of the best protection in its class. Tested at some of the finest test laboratories, and certified by ECB-S Germany, the Strong Rooms assure you of the highest level of security.

Light Weight Construction:

The Modular Strong Room elements are fabricated with the latest Torch, Tool, Drill and Explosive resistant barrier technology. The modern light weight barrier ensures slimmer walls for the panels and doors, reducing the overall floor loading and thereby, the need for additional architectural re-inforcements.

Widest Range

Godrej provides a wide range of certified Security - the resistance grades offered are Grades V/ V EX, VI/ VI EX, VII/ VII EX, VIII/ VIII EX, CD, IX/ IX EX, CD, X/ X EX, CD, XI/ XI EX, CD, XIII/ XIII EX, CD, XIII/ XIII EX, CD. T2 OPTION AVAILABLE FOR ALL GRADES

Attractive Finish Options:

The Strong Room elements are supplied in Primed Finish to allow you the flexibility to modify as per your interiors. The Strong Room Doors may be finished with a superior quality paint finish or may be completely clad with Stainless Steel.

GODREJ DEFENDER PRO SERIES - DEMOUNTABLE VAULTS

GRADE V - EX	GRADE VI - EX	GRADE VI - EX	GRADE VIII - CD, EX	GRADE IX - CD, EX				GRADE XIII - CD, EX
			EN1143 - 1	, T1 AND T	2 OPTIONS			
			ECE	s.s - GERM	ANY			
		CNPF	- FRANCE	AND INSTI	TUTO GIOR	DANO		
V-EX	VI-EX	VII-EX	VIII-CD, EX	IX-CD, EX	X-CD, EX	XI-CD, EX	XII-CD, EX	XIII-CD, EX
V-EX	VI-EX	VII-EX	VIII-CD, EX	IX-CD, EX	X-CD, EX	XI-CD, EX	XII-CD, EX	XIII-CD, EX
YES	YES	YES	YES	YES	YES	YES	YES	YES
N/A	N/A	N/A	YES	YES	YES	YES	YES	YES
60	60	75	100	125	150	170	240	340
210	225	250	320	400	480	600	780	1135
YES	YES	YES	YES	YES	YES	YES	YES	YES
			PRIMED / P.	AINTED / S	S CLADDE)		
				PRIMED				
2	2	2	2	2	2	3	3	2
В	С	С	С	С	С	С	С	D
	V-EX V-EX YES N/A 60 210 YES	V-EX VI-EX VI-EX V-EX VI-EX YES YES N/A N/A 60 60 210 225 YES YES YES 2 2	CNPF V-EX	- EX	- EX	- EX	FX	EN1143 - 1, T1 AND T2 OPTIONS ECB.S - GERMANY CNPP - FRANCE AND INSTITUTO GIORDANO V-EX VI-EX VII-EX VIII-CD, EX IX-CD, EX X-CD, EX XI-CD, EX XII-CD, EX Y-EX Y-EX Y-EX Y-EX Y-EX Y-EX Y-EX Y


T2 OPTION AVAILABLE FOR ALL GRADES

GODREJ DEFENDER PRO SERIES - STRONG ROOM DOORS

	MODEL	GRADE V	GRADE VI	GRADE VII	GRADE VIII	GRADE IX	GRADE X	GRADE XI	GRADE XII	GRADE XIII		
	E X mm	2272	2272	2272	2272	2325	2325	2325	2325	2325		
	N mm	1354	1354	1379	1385	1399	1405	1435	1469	1501		
W A	O D Mm D	2192	2192	2192	2172	2172	2172	2172	2172	2172		
L	N	1294	1294	1319	1285	1299	1305	1335	1369	1401		
	CLEAR OPENING (HXW) (mm)					2000 X 920)					
	STANDARD		EN1143 - 1, T1 AND T2 OPTIONS									
	CERTIFIED BY	ECB.S - GERMANY										
_	TYPE OF LOCK EN 1300 CERTIFIED	CLASS B, 2 Nos.	CLASS C, 2 Nos.	CLASS C, 2 Nos.	CLASS C, 2 Nos.	CLASS C, 2 Nos.	CLASS C, 2 Nos.	CLASS C, 3 Nos.	CLASS C, 3 Nos.	CLASS D, 2 Nos.		
	Кg	1011	1035	1154	1387	1596	1858	2207	2879	3875		
	OPTIONS - EX	√	√	√	√	√	√	√	√	√		
	OPTIONS - EX, CD	NA	NA	NA	√	√	✓	\checkmark	\checkmark	√		

T2 OPTION AVAILABLE FOR ALL GRADES

DEFENDER PRO - GRADE Ø

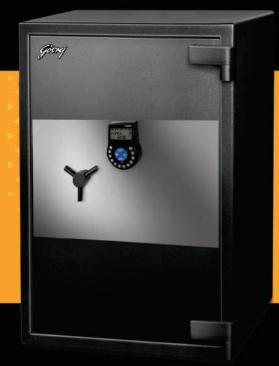













For SS Fascia Extra charges apply

Features


- Tested and certified by VdS Germany, as per EN 1143 1, Grade 0
- Certified by ECB.S Germany for Fire Resistance 60P
- Contemporary light-weight design and construction
- Standard safe comes fitted with a high security Double Bitted Class A Key Lock as per EN 1300 standards
- Options available for Digital Electronic and Mechanical Combination locks certified as per EN 1300 standards
- Overnight cash cover €10,000

(The above cash cover rating is recommended rating for the Business/Industrial Sector in an unsupported environment. The recommended cash cover for Private Individual or Domestic use will be €40,000. However, these are indicative overnight cash covers only and may vary across geographical locations, depending on statutory compliance requirements and local laws. Insurers may assign different values to the one recommended above.)


MODEL	014D	019D	023	028	035S	043S	051S	059	063		
1 2, mm □	455	585	685	800	1000	1200	1400	1600	1700		
<u>↓</u> mm □	455	455	520	550	610	610	610	610	770		
1 2, mm ■	500	500	615	640	615	615	615	520	660		
₩ mm 🗐	355	485	585	700	900	1100	1300	1500	1600		
12 mm 13	355	355	420	450	510	510	510	510	670		
1 2, mm □	310	310	425	450	425	425	425	330	470		
OR AT 90° (OD) (mm)	923	923	1103	1158	1193	1193	1193	1098	1398		
DOOR AT 180° (OW) (mm)		845	975	1035	1155	1155	1155	1155	1475		
OR SWING RADIUS (S) (mm)	405	405	470	500	560	560	560	560	720		
IN (Ltrs)	39	53	105	140	195	238	281	252	503		
	124	148	207	247	308	361	410	421	612		
ODUCT RATING	TESTED & CERTIFIED BY VdS - GERMANY, ECB.S - GERMANY & CNPP - FRANCE										
RGLARY RESISTANCE	EN 1143 - 1, GRADE 0										
E RESISTANCE	NT 017 -	60 P, ECB.	S Germany								
D. HANGING OF DOOR		RIGHT HUNG									
	1	1	2	2	3	3	3	3	3		
D. LOCKING"	1 No. EN	1300 CLAS	S A, DOUB	LE BITTED I	KEY LOCK.						
	Mmm I I I I I I I I I I I I I I I I I I	455 455 500 500 500 500 500 550 550 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 650 6	455 585 455 455 500 500 500 500 485 355 485 355 355 310 310 310 310 OR AT 90° (OD) (mm) 923 923 OR AT 180° (OW) (mm) 845 845 OR SWING RADIUS (S) (mm) 405 405 IN (Ltrs) 39 53 124 148 ODUCT RATING TESTED & CERTIFIE RGLARY RESISTANCE EN 1143 - 1, GRADE E RESISTANCE NT 017 - 60 P, ECB.3 D. HANGING OF DOOR RIGHT HUNG 1 1	455 585 685 455 455 520 500 500 615 500 500 615 500 355 485 585 685 685 685 686 685 686 686	455 585 685 800 455 455 520 550 500 500 615 640 500 500 615 640 500 355 485 585 700 355 355 420 450 600 AT 90° (OD) (mm) 923 923 1103 1158 600 OR AT 180° (OW) (mm) 845 845 975 1035 600 OR SWING RADIUS (S) (mm) 405 405 470 500 601 IN (Ltrs) 39 53 105 140 602 124 148 207 247 603 ODUCT RATING TESTED & CERTIFIED BY VdS - GERMANN 603 RGLARY RESISTANCE EN 1143 - 1, GRADE 0 604 ERESISTANCE IN 1143 - 1, GRADE 0 605 IN 1143 - 1, GRADE 0 606 IN 1143 - 1, GRADE 0 607 IN 1140 I	455 585 685 800 1000 1	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 2 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3	455 585 685 800 1000 1200 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400 1400	455 585 685 800 1000 1200 1400 1600		

TOLERANCES ON WEIGHT - +/- 10%

BESPOKE SIZES AVAILABLE - PLEASE CHECK WITH US FOR AVAILABLE VARIATIONS IN DIMENSIONS.

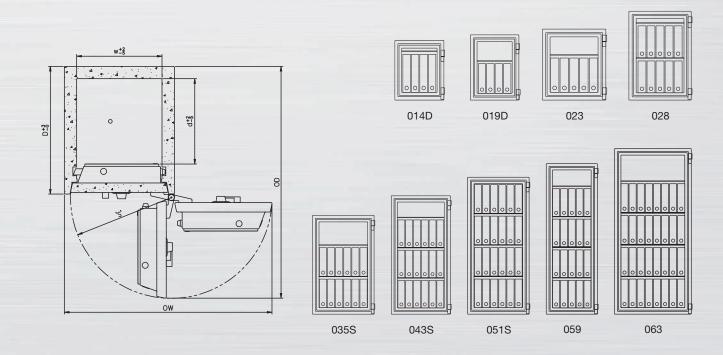

DEFENDER PRO - GRADE I

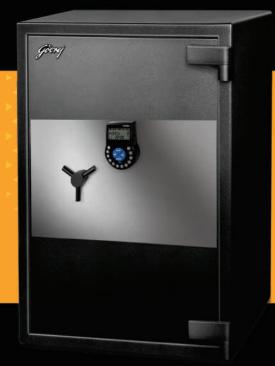















For SS Fascia Extra charges apply

Features


- Tested and Certified by VdS Germany, ECP.S Germany and CNPP France as per EN 1143 1, Grade I, T2 Certified option available
- Certified by ECB.S Germany for Fire Resistance 60P
- Contemporary light-weight design and construction
- Standard safe comes fitted with a high security Double Bitted Class A Key Lock as per EN 1300 standards
- Options available for Digital Electronic and Mechanical Combination locks certified as per EN 1300 standards
- Overnight cash cover €20,000

(The above cash cover rating is recommended for the Business/Industrial Sector in an unsupported environment. The recommended cash cover for Private Individual or Domestic use will be €65,000. However, these are indicative overnight cash covers only and may vary across geographical locations, depending on statutory compliance requirements and local laws. Insurers may assign different cash cover values to the one recommended above.)


	MODEL	M14S*	M14D	M19D	M23	M28	M28WD	M35S	M43S	M51S	M59	M63
E	₩ mm 🗐	455	455	585	685	800	800	1000	1200	1400	1600	1700
Χ	₽mm ■	405	455	455	520	550	610	610	610	610	610	770
Т		370	500	500	615	640	615	615	615	615	520	660
I	₩ mm 🗐	355	355	485	585	700	700	900	1100	1300	1500	1600
Ν	₽mm =	305	355	355	420	450	510	510	510	510	510	670
Т	1 2> mm □	180	310	310	425	450	425	425	425	425	330	470
DC	OOR AT 90° (OD) (mm)	743	923	923	1103	1158	1193	1193	1193	1193	1098	1398
DC	DOOR AT 180° (OW) (mm)		845	845	975	1035	1155	1155	1155	1155	1155	1475
DC	OR SWING RADIUS (S) (mm)	355	405	405	470	500	560	560	560	560	560	720
V	IN (Ltrs)	19.5	39	53	105	140	151	195	238	281	252	503
[ĸ	g	97	124	148	207	247	260	308	361	410	421	612
PR	ODUCT RATING	CERTIFIED BY ECB.S - GERMANY, CNPP - FRANCE & VdS - GERMANY										
BU	IRGLARY RESISTANCE	EN 114	EN 1143 - 1, GRADE I; T2 CERTIFIED OPTION AVAILABLE									
FIF	RE RESISTANCE	NT 017	- 60 P, E	CB.S Gerr	many							
ST	D. HANGING OF DOOR			RIGHT HUNG								
		1	1	1	2	2	2	3	3	3	3	3
ST	D. LOCKING"	1 No. E	N 1300 C	LASS A, [OUBLE E	BITTED KE	Y LOCK.					

TOLERANCES ON WEIGHT - +/- 10%

BESPOKE SIZES AVAILABLE - PLEASE CHECK WITH US FOR AVAILABLE VARIATIONS IN DIMENSIONS.

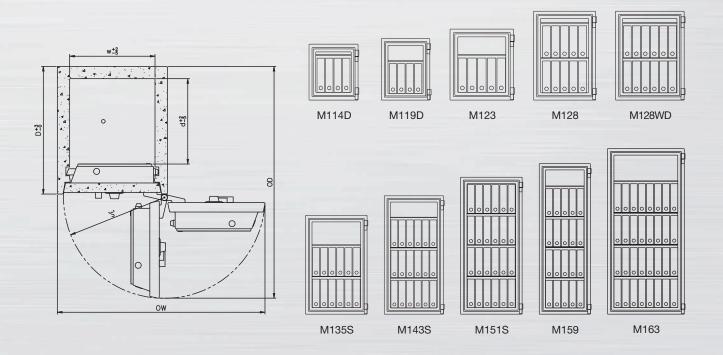

DEFENDER PRO - GRADE II

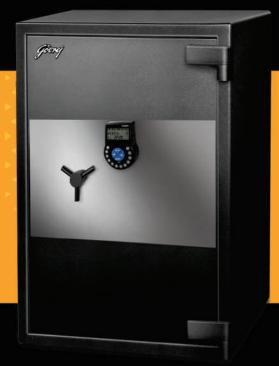















For SS Fascia Extra charges apply

Features


- Tested and Certified by VdS Germany, ECP.S Germany and CNPP France as per EN 1143 1, Grade II, T2 Certified option available
- Certified by ECB.S Germany for Fire Resistance 60P
- Contemporary light-weight design and construction
- Standard safe comes fitted with a high security Double Bitted Class A Key Lock as per EN 1300 standards
- Options available for Digital Electronic and Mechanical Combination locks certified as per EN 1300 standards
- Overnight cash cover €50,000

(The above cash cover rating is recommended for the Business/Industrial Sector in an unsupported environment. The recommended cash cover for Private Individual or Domestic use will be €100,000. However, these are indicative overnight cash covers only and may vary across geographical locations, depending on statutory compliance requirements and local laws. Insurers may assign different cash cover values to the one recommended above.)


	MODEL	D14D	D19D	D23	D28	D28WD	D35S	D43S	D51S	D59	D63	
Е	1 2, mm □	485	615	715	830	830	1030	1230	1430	1630	1730	
Χ	<u> </u>	485	485	550	580	640	640	640	640	640	800	
Т		533	533	648	673	648	648	648	648	553	693	
T	1 2→ mm □	355	485	585	700	700	900	1100	1300	1500	1600	
Ν	<u> </u>	355	355	420	450	510	510	510	510	510	670	
Т	1 2→ mm □	310	310	425	450	425	425	425	425	330	470	
DO	OR AT 90° (OD) (mm)	987	987	1167	1222	1257	1257	1257	1257	1162	1462	
DO	OR AT 180° (OW) (mm)	905	905	1035	1095	1215	1215	1215	1215	1215	1535	
DO	OR SWING RADIUS (S) (mm)	435	435	500	530	590	590	590	590	590	750	
V] IN (Ltrs)	39	53	105	140	151	195	238	281	252	503	
Kg		182	200	284	339	356	407	471	532	575	738	
PR	ODUCT RATING	CERTIFIED BY ECB.S - GERMANY, CNPP - FRANCE & VdS - GERMANY										
BUI	RGLARY RESISTANCE	EN 1143	3 - 1, GRA[DE II; T2 CE	RTIFIED C	PTION AV	AILABLE					
FIR	E RESISTANCE	NT 017	- 60 P, ECI	3.S Germa	ny							
STI	D. HANGING OF DOOR		RIGHT HUNG									
		1	1	2	2	2	3	3	3	3	3	
STI	D. LOCKING"	1 No. El	N 1300 CL	ASS A, DO	UBLE BITT	ED KEY LO	OCK.					

TOLERANCES ON WEIGHT - +/- 10%

BESPOKE SIZES AVAILABLE - PLEASE CHECK WITH US FOR AVAILABLE VARIATIONS IN DIMENSIONS.

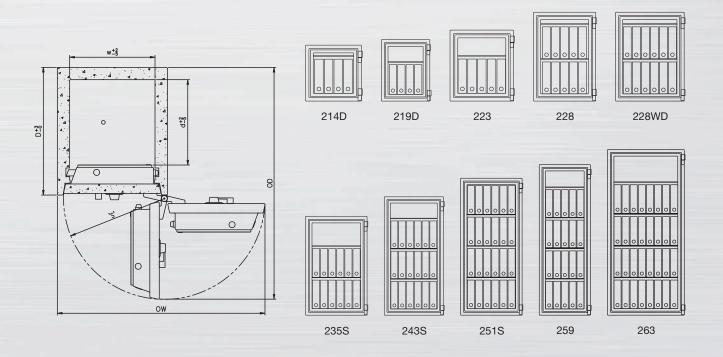

DEFENDER PRO - GRADE III

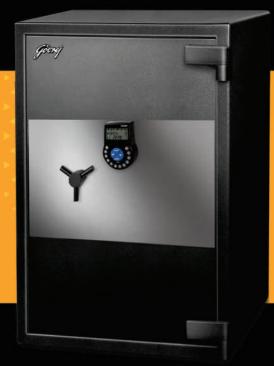











For SS Fascia Extra charges apply

Features


- Tested and certified by VdS Germany, as per EN 1143 1, Grade III
- Certified by ECB.S Germany for Fire Resistance 60P
- Contemporary light-weight design and construction
- Standard safe comes fitted with a high security Double Bitted Class B Key Lock as per EN 1300 standards
- Options available for Digital Electronic and Mechanical Combination locks certified as per EN 1300 standards
- Overnight cash cover €100,000

(The above cash cover rating is recommended for the Business/Industrial Sector in an unsupported environment. The recommended cash cover for Private Individual or Domestic use will be €200,000. However, these are indicative overnight cash covers only and may vary across geographical locations, depending on statutory compliance requirements and local laws. Insurers may assign different cash cover values to the one recommended above.)

	MODEL	314D	319D	323	328	335S	343S	351S	363			
Е	₩ mm □	485	615	715	830	1030	1230	1430	1730			
Χ	<u> </u>	485	485	550	580	640	640	640	800			
Т		533	533	648	673	648	648	648	693			
ı	1 2, mm □	355	485	585	700	900	1100	1300	1600			
Ν	<u> </u>	355	355	420	450	510	510	510	670			
Т	1 2→ mm □	310	310	425	450	425	425	425	470			
DO	OR AT 90° (OD) (mm)	987	987	1167	1222	1257	1257	1257	1462			
DO	OR AT 180° (OW) (mm)	905	905	1035	1095	1215	1215	1215	1535			
DO	OR SWING RADIUS (S) (mm)	435	435	500	530	590	590	590	750			
V (I	IN (Ltrs)	39	53	105	140	195	238	281	503			
Kg		238	280	385	455	569	666	758	1086			
PR	ODUCT RATING	TESTED & CERTIFIED BY VdS - GERMANY										
BU	RGLARY RESISTANCE	EN 1143 - 1, GRADE III										
FIR	E RESISTANCE	NT 017 -	60 P, ECB.	S Germany								
STI	D. HANGING OF DOOR		RIGHT HUNG									
		1	1	2	2	2	3	3	3			
STI	D. LOCKING"	1 No. EN	1300 CLAS	S B, DOUB	LE BITTED	KEY LOCK.						

TOLERANCES ON WEIGHT - +/- 10%

BESPOKE SIZES AVAILABLE - PLEASE CHECK WITH US FOR AVAILABLE VARIATIONS IN DIMENSIONS.

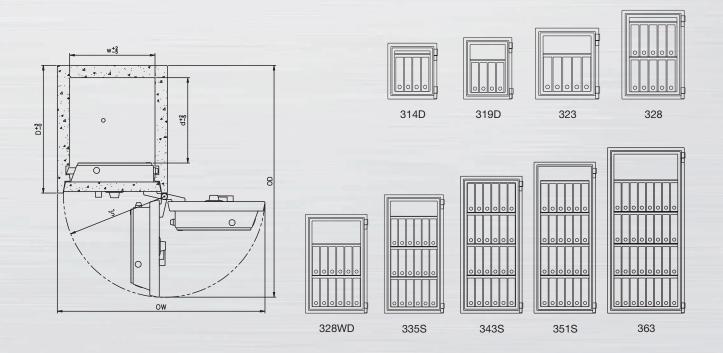

DEFENDER PRO - GRADE IV CD













Features

- Tested and certified by VdS Germany & ECB.S Germany, as per EN 1143 1, Grade IV CD
- Certified by ECB.S Germany for Fire Resistance 90P
- Contemporary light-weight design and construction
- Standard safe comes fitted with two high security Double Bitted Class B Key Locks as per EN 1300 standards
- Options available for Digital Electronic and Mechanical Combination locks certified as per EN 1300 standards
- Overnight cash cover €150,000


(The above cash cover rating is recommended for the Business/Industrial Sector in an unsupported environment. The recommended cash cover for Private Individual or Domestic use will be €400,000. However, these are indicative overnight cash covers only and may vary across geographical locations, depending on statutory compliance requirements and local laws. Insurers may assign different cash cover values to the one recommended above.)

EL	424*	435	447S	455S	467S	467				
	790	1090	1390	1590	1890	1890				
	690	690	690	690	940	940				
	730	730	730	730	730	830				
	600	900	1200	1400	1700	1700				
	500	500	500	500	750	750				
	450	450	450	450	450	550				
90° (OD) (mm)	1357	1357	1357	1357	1607	1707				
180° (OW) (mm)	1271	1271	1271	1271	1771	1771				
ING RADIUS (S) (mm)	609	609	609	609	859	859				
rs)	135	202	270	315	573	701				
	705	906	1075	1195	1685	1846				
T RATING	TESTED & CERTIFIED BY VdS - GERMANY & ECB.S - GERMANY									
RY RESISTANCE	EN 1143 - 1, GRADE IV - CD									
STANCE	NT 017 - 90 P, ECB.S Germany									
IGING OF DOOR	RIGHT HUNG									
	2	3	3	3	3	3				
KING"	02 Nos. EN-1300 CLASS B, DOUBLE BITTED KEY LOCKS.									
	POOR (OD) (mm) 180° (OW) (mm) ING RADIUS (S) (mm) ING RATING IY RESISTANCE STANCE GING OF DOOR	790 690 730 600 500 500 450 90° (OD) (mm) 1357 180° (OW) (mm) 1271 ING RADIUS (S) (mm) 609 rs) 135 705 FRATING TESTED & CE BY RESISTANCE STANCE NT 017 - 90 P, GING OF DOOR RIGHT HUNG 2	790 1090 690 690 730 730 730 600 900 500 500 450 450 90° (OD) (mm) 1357 1357 180° (OW) (mm) 1271 1271 ING RADIUS (S) (mm) 609 609 rs) 135 202 705 906 FRATING TESTED & CERTIFIED BY VdS - Y RESISTANCE EN 1143 - 1, GRADE IV - CD STANCE NT 017 - 90 P, ECB.S Germany GING OF DOOR RIGHT HUNG	790	790	790				

TOLERANCES ON WEIGHT - +/- 10%

BESPOKE SIZES AVAILABLE - PLEASE CHECK WITH US FOR AVAILABLE VARIATIONS IN DIMENSIONS.

MODEL 424 IS FIRE RATED AS 60P

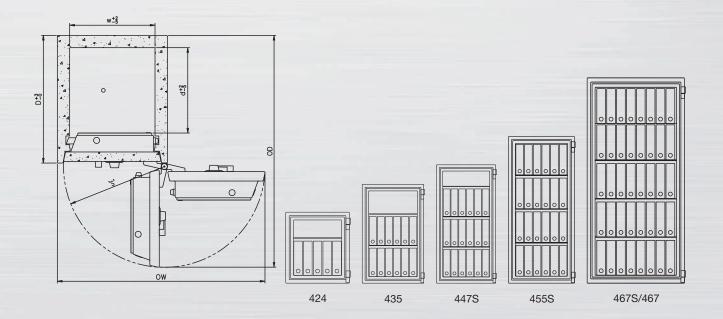

15

DEFENDER PRO - GRADE V CD















Features

- Tested and certified by VdS Germany & ECB.S Germany, as per EN 1143 1, Grade V CD
- Certified by ECB.S Germany for Fire Resistance 90P
- Contemporary light-weight design and construction
- Standard safe comes fitted with two high security Double Bitted Class B Key Locks as per EN 1300 standards
- Options available for Digital Electronic and Mechanical Combination locks certified as per EN 1300 standards
- Overnight cash cover €250,000


(The above cash cover rating is recommended for the Business/Industrial Sector in an unsupported environment. However, this is an indicative overnight cash cover only and may vary across geographical locations, depending on statutory compliance requirements and local laws. Insurers may assign different cash cover values to the one recommended above.)

	MODEL	524	535	547S	555S	567S	567				
Е	₩ mm 🗐	790	1090	1390	1590	1890	1890				
Χ	△ mm □	690	690	690	690	940	940				
Т	<u>↓</u> mm	730	730	730	730	730	830				
I	₩ mm 🗐	600	900	1200	1400	1700	1700				
Ν	<u>↓</u> mm □	500	500	500	500	750	750				
Т		450	450	450	450	450	550				
DC	DOR AT 90° (OD) (mm)	1357	1357	1357	1357	1607	1707				
DC	OOR AT 180° (OW) (mm)	1271	1271	1271	1271	1771	1771				
DC	OOR SWING RADIUS (S) (mm)	609	609	609	609	859	859				
V	IN (Ltrs)	135	202	270	315	573	701				
K	g	720	924	1097	1223	1708	1898				
PF	RODUCT RATING	TESTED & CERTIFIED BY VdS - GERMANY & ECB.S - GERMANY									
BU	JRGLARY RESISTANCE	EN 1143 - 1, GRADE V - CD; T2 CERTIFIED OPTION AVAILABLE									
FIF	RE RESISTANCE	NT 017 - 90 P, ECB.S Germany									
ST	D. HANGING OF DOOR	RIGHT HUNG									
		2	3	3	3	3	3				
ST	D. LOCKING"	02 Nos. EN 1300 CLASS B, DOUBLE BITTED KEY LOCKS.									

TOLERANCES ON WEIGHT - +/- 10%

BESPOKE SIZES AVAILABLE - PLEASE CHECK WITH US FOR AVAILABLE VARIATIONS IN DIMENSIONS.

MODEL 524 IS FIRE RATED AS 60P

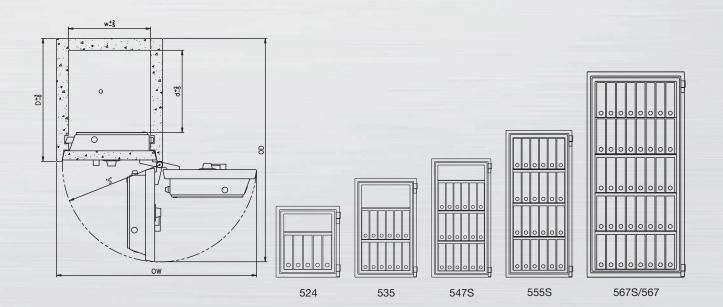

EUROCASH - GRADE III



Features


- Tested and certified by CNPP France & ECB.S Germany, as per EN 1143 1, Grade III. T2 Certified option available
- Certified by ECB.S Germany for Fire Resistance 60P
- Contemporary light-weight design and construction
- Standard safe comes fitted with a high security Double Bitted Class B Key Lock as per EN 1300 standards
- Options available for Digital Electronic and Mechanical Combination locks certified as per EN 1300 standards
- Overnight cash cover €100,000

(The above cash cover rating is recommended for the Business/Industrial Sector in an unsupported environment. The recommended cash cover for Private Individual or Domestic use will be €200,000. However, these are indicative overnight cash covers only and may vary across geographical locations, depending on statutory compliance requirements and local laws. Insurers may assign different cash cover values to the one recommended above.)

MODEL	T14D	T19D	T23	T28	T28WD	T35S	T43S	T51S	T59	T63	
1 2, mm □	485	615	715	830	830	1030	1230	1430	1630	1730	
<u>₽</u> mm □	485	485	550	580	640	640	640	640	640	800	
^_> mm □	533	533	648	673	648	648	648	648	553	693	
₩ mm 🗐	355	485	585	700	700	900	1100	1300	1500	1600	
<u></u>	355	355	420	450	510	510	510	510	510	670	
1 2₃ mm □	310	310	425	450	425	425	425	425	330	470	
OR AT 90° (OD) (mm)	987	987	1167	1222	1257	1257	1257	1257	1162	1462	
OR AT 180° (OW) (mm)	905	905	1035	1095	1215	1215	1215	1215	1215	1535	
OR SWING RADIUS (S) (mm)	435	435	500	530	590	590	590	590	590	750	
IN (Ltrs)	39	53	105	140	151	195	238	281	252	503	
	185	205	289	343	360	412	475	538	580	742	
ODUCT RATING	TESTED & CERTIFIED BY CNPP - FRANCE & ECB.S - GERMANY										
RGLARY RESISTANCE	EN 1143 - 1, GRADE III; T2 CERTIFIED OPTION AVAILABLE										
E RESISTANCE	NT 017	- 60 P, ECE	3.S Germa	ny							
D. HANGING OF DOOR		RIGHT HUNG									
	1	1	2	2	2	3	3	3	3	3	
D. LOCKING"	1 No. EN	1 No. EN 1300 CLASS B, DOUBLE BITTED KEY LOCK.									
	Amm O	485 485 485 333 355 355 310 OR AT 90° (OD) (mm) OR AT 180° (OW) (mm) OR SWING RADIUS (S) (mm) 185 ODUCT RATING RGLARY RESISTANCE E RESISTANCE D. HANGING OF DOOR 1	485 615 485 485 485 485 333 533 353 533 355 485 355 355 310 310 310 310 OR AT 90° (OD) (mm) 987 987 OR AT 180° (OW) (mm) 905 905 OR SWING RADIUS (S) (mm) 435 435 IN (Ltrs) 39 53 IN (Ltrs) 39 53 IN (Ltrs) TESTED & CERTIFE RGLARY RESISTANCE EN 1143 - 1, GRAE E RESISTANCE NT 017 - 60 P, ECE D. HANGING OF DOOR RIGHT HUNG 1 1	485 615 715 485 485 550 533 533 648 533 533 648 535 485 585 535 420 310 310 425 OR AT 90° (OD) (mm) 987 987 1167 OR AT 180° (OW) (mm) 905 905 1035 OR SWING RADIUS (S) (mm) 435 435 500 IN (Ltrs) 39 53 105 RGLARY RESISTANCE EN 1143 - 1, GRADE III; T2 CE E RESISTANCE NT 017 - 60 P, ECB.S Germa D. HANGING OF DOOR RIGHT HUNG 1 1 2	485 615 715 830 485 485 550 580 533 533 648 673 535 485 585 700 535 355 420 450 5310 310 425 450 COR AT 90° (OD) (mm) 987 987 1167 1222 OR AT 180° (OW) (mm) 905 905 1035 1095 OR SWING RADIUS (S) (mm) 435 435 500 530 IN (Ltrs) 39 53 105 140 185 205 289 343 ODUCT RATING TESTED & CERTIFIED BY CNPP - FRA RGLARY RESISTANCE EN 1143 - 1, GRADE III; T2 CERTIFIED COR E RESISTANCE NT 017 - 60 P, ECB.S Germany D. HANGING OF DOOR 1 1 1 2 2	485 615 715 830 830 485 485 550 580 640 485 485 550 580 640 533 533 648 673 648 535 485 585 700 700 535 355 420 450 510 5310 310 310 425 450 425 OR AT 90° (OD) (mm) 987 987 1167 1222 1257 OR AT 180° (OW) (mm) 905 905 1035 1095 1215 OR SWING RADIUS (S) (mm) 435 435 500 530 590 IN (Ltrs) 39 53 105 140 151 185 205 289 343 360 ODUCT RATING TESTED & CERTIFIED BY CNPP - FRANCE & ECERGLARY RESISTANCE EN 1143 - 1, GRADE III; T2 CERTIFIED OPTION AVER ERESISTANCE EN 1143 - 1, GRADE III; T2 CERTIFIED OPTION AVER ERESISTANCE EN 1143 - 1, GRADE III; T2 CERTIFIED OPTION AVER ERESISTANCE EN 1143 - 1, GRADE III; T2 CERTIFIED OPTION AVER ERESISTANCE EN 1143 - 1, GRADE III; T2 CERTIFIED OPTION AVER ERESISTANCE EN 1143 - 1, GRADE III; T2 CERTIFIED OPTION AVER ERESISTANCE EN 1143 - 1, GRADE III; T2 CERTIFIED OPTION AVER ERESISTANCE EN 1143 - 1, GRADE III; T2 CERTIFIED OPTION AVER ERESISTANCE EN 1143 - 1, GRADE III; T2 CERTIFIED OPTION AVER ERESISTANCE EN 1143 - 1, GRADE III; T2 CERTIFIED OPTION AVER ERESISTANCE EN 1143 - 1, GRADE III; T2 CERTIFIED OPTION AVER ERESISTANCE EN 1143 - 1, GRADE III; T2 CERTIFIED OPTION AVER ERESISTANCE EN 1143 - 1, GRADE III; T2 CERTIFIED OPTION AVER ERESISTANCE EN 1143 - 1, GRADE III; T2 CERTIFIED OPTION AVER ERESISTANCE EN 1143 - 1, GRADE III; T2 CERTIFIED OPTION AVER ERESISTANCE EN 1143 - 1, GRADE III; T2 CERTIFIED OPTION AVER ERESISTANCE EN 1143 - 1, GRADE III; T2 CERTIFIED OPTION AVER ERESISTANCE EN 1143 - 1, GRADE III; T2 CERTIFIED OPTION AVER ERESISTANCE EN 1143 - 1, GRADE III; T2 CERTIFIED OPTION AVER ERESISTANCE EN 1143 - 1, GRADE III; T2 CERTIFIED OPTION AVER ERESISTANCE EN 1143 - 1, GRADE III; T2 CERTIFIED OPTION AVER ERESISTANCE EN 1143 - 1, GRADE III; T2 CERTIFIED OPTION AVER ERESISTANCE EN 1143 - 1, GRADE III; T2 CERTIFIED OPTION AVER ERESISTANCE EN 1143 - 1, GRADE III; T2 CERTIFIED OPTION AVER ERESISTANCE EN 1143 - 1, GRADE III; T2 CERTIFIED OPTION AVER ERESISTANCE EN 1143 - 1, GRADE III; T2 CERTIFIED OPTION AVER ERESISTANCE EN 1143 - 1, GRADE III; T2 CERTIFIED OPTION AVER EN	485 615 715 830 830 1030 485 485 550 580 640 640 533 533 648 673 648 648 535 485 585 700 700 900 535 355 420 450 510 510 510 510 510 510 60 AT 90° (OD) (mm) 987 987 1167 1222 1257 1257 60 AT 180° (OW) (mm) 905 905 1035 1095 1215 1215 60 CR SWING RADIUS (S) (mm) 435 435 500 530 590 590 10 IN (Ltrs) 39 53 105 140 151 195 10 DUCT RATING TESTED & CERTIFIED BY CNPP - FRANCE & ECB.S - GERMAL ANGING OF DOOR RELARY RESISTANCE EN 1143 - 1, GRADE III; T2 CERTIFIED OPTION AVAILABLE ERESISTANCE NT 017 - 60 P, ECB.S Germany RIGHT HUNG 1 1 1 2 2 2 3 3	Marin 485 615 715 830 830 1030 1230 Marin 485 485 550 580 640 640 640 Marin 533 533 648 673 648 648 648 Marin 355 485 585 700 700 900 1100 Marin 355 355 420 450 510 510 510 Marin 310 310 425 450 425 425 425 OR AT 90° (OD) (mm) 987 987 1167 1222 1257 1257 1257 OR SWING RADIUS (S) (mm) 905 905 1035 1095 1215 1215 1215 OR SWING RADIUS (S) (mm) 435 435 500 530 590 590 590 JIN (Ltrs) 39 53 105 140 151 195 238 DOUCT RATING TESTED & CERTIFIED BY CNPP - FRANCE & ECB.S - GERMANY REARY RESISTANCE NT 017 - 60 P, ECB.S Germany D. HA	Marting Mar	485 615 715 830 830 1030 1230 1430 1630	

TOLERANCES ON WEIGHT - +/- 10%

BESPOKE SIZES AVAILABLE - PLEASE CHECK WITH US FOR AVAILABLE VARIATIONS IN DIMENSIONS.

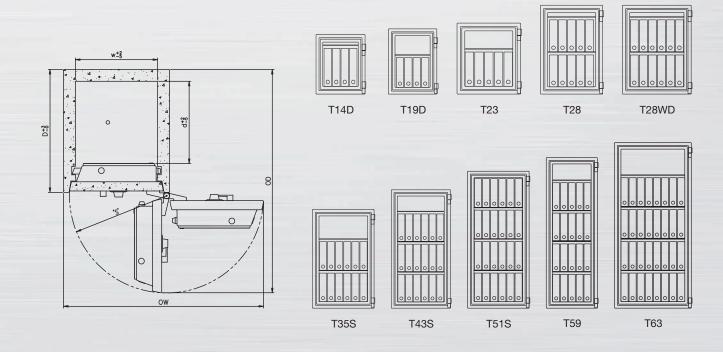

EUROCASH - GRADE IV















Features


- Tested and certified by CNPP France & ECB.S Germany, as per EN 1143 1, Grade IV. T2 Certified option available
- Certified by ECB.S Germany for Fire Resistance 60P
- Contemporary light-weight design and construction
- Standard safe comes fitted with two high security Double Bitted Class B Key Locks as per EN 1300 standards
- Options available for Digital Electronic and Mechanical Combination locks certified as per EN 1300 standards
- Overnight cash cover €150,000


(The above cash cover rating is recommended for the Business/Industrial Sector in an unsupported environment. The recommended cash cover for Private Individual or Domestic use will be €400,000. However, these are indicative overnight cash covers only and may vary across geographical locations, depending on statutory compliance requirements and local laws. Insurers may assign different cash cover values to the one recommended above.)

	MODEL	F23	F28	F28WD	F35S	F43S	F51S	F63			
Е	1 2, mm □	715	830	830	1030	1230	1430	1730			
Χ	<u>₽</u> mm □	550	580	640	640	640	640	800			
Т	^_> mm □	648	673	648	648	648	648	693			
1	1 2→ mm □	585	700	700	900	1100	1300	1600			
Ν	<u>₽</u> mm □	420	450	510	510	510	510	670			
Т	1 2→ mm □	425	450	425	425	425	425	470			
DC	OOR AT 90° (OD) (mm)	1168	1223	1258	1258	1258	1258	1463			
DC	OOR AT 180° (OW) (mm)	1036	1096	1216	1216	1216	1216	1536			
DO	OR SWING RADIUS (S) (mm)	500	530	590	590	590	590	750			
V (IN (Ltrs)	105	140	151	195	238	281	503			
Kg		392	461	481	574	671	763	1091			
PR	ODUCT RATING	TESTED & CERTIFIED BY CNPP - FRANCE & ECB.S - GERMANY									
BU	RGLARY RESISTANCE	EN 1143 - 1, GRADE IV; T2 CERTIFIED OPTION AVAILABLE									
FIF	E RESISTANCE	NT 017 - 60 P, ECB.S Germany									
ST	D. HANGING OF DOOR	RIGHT HUNG									
		2	2	2	3	3	3	3			
ST	D. LOCKING"	02 Nos. EN 1300 CLASS B, DOUBLE BITTED KEY LOCKS.									

TOLERANCES ON WEIGHT - +/- 10%

BESPOKE SIZES AVAILABLE - PLEASE CHECK WITH US FOR AVAILABLE VARIATIONS IN DIMENSIONS.



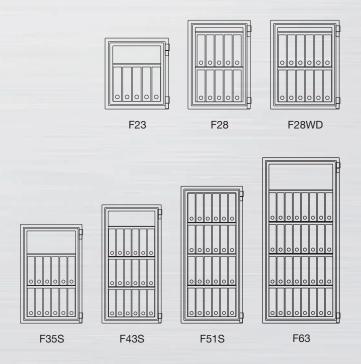

21

EUROCASH - GRADE V













Features


- Tested and certified by LPCB UK, as per EN 1143 1, Grade $\rm V$
- Certified by ECB.S Germany for Fire Resistance 60P
- Contemporary light-weight design and construction
- Standard safe comes fitted with two high security Double Bitted Class B Key Locks as per EN 1300 standards
- Options available for Digital Electronic and Mechanical Combination locks certified as per EN 1300 standards
- Overnight cash cover €250,000


(The above cash cover rating is recommended for the Business/Industrial Sector in an unsupported environment. However, this is an indicative overnight cash cover only and may vary across geographical locations, depending on statutory compliance requirements and local laws. Insurers may assign different cash cover values to the one recommended above.)

	MODEL	P23	P28	P28WD	P35S	P43S	P51S	P63			
Е	<u> </u>	715	830	830	1030	1230	1430	1730			
Χ	<u></u>	550	580	640	640	640	640	800			
Т	2 , mm □	648	673	648	648	648	648	693			
I	↑ mm 🗐	585	700	700	900	1100	1300	1600			
Ν	₩ mm 🗐	420	450	510	510	510	510	670			
Т	2 , mm □	425	450	425	425	425	425	470			
DO	OR AT 90° (OD) (mm)	1168	1223	1258	1258	1258	1258	1463			
DO	OR AT 180° (OW) (mm)	1036	1096	1216	1216	1216	1216	1536			
DO	OR SWING RADIUS (S) (mm)	500	530	590	590	590	590	750			
V (J IN (Ltrs)	105	140	151	195	238	281	503			
Kg		395	465	486	579	678	769	1098			
PR	ODUCT RATING	TESTED & CERTIFIED BY LPCB - UK									
BU	RGLARY RESISTANCE	EN 1143 - 1, GRADE V									
FIR	E RESISTANCE	NT 017 - 60 P, ECB.S Germany									
STI	D. HANGING OF DOOR	RIGHT HUNG									
		2	2	2	3	3	3	3			
STI	D. LOCKING"	02 Nos. EN 1300 CLASS B, DOUBLE BITTED KEY LOCKS.									

TOLERANCES ON WEIGHT - +/- 10%

BESPOKE SIZES AVAILABLE - PLEASE CHECK WITH US FOR AVAILABLE VARIATIONS IN DIMENSIONS.



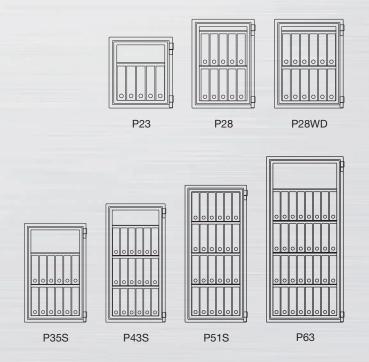

23

EUROCASH - GRADE VI CD











Features

- Tested and certified by ECB.S Germany, as per EN 1143 1, Grade VI CD
- Certified by ECB.S Germany for Fire Resistance 90P
- Contemporary light-weight design and construction
- Standard safe comes fitted with two high security Double Bitted Class C Key Locks as per EN 1300 standards
- Options available for Digital Electronic and Mechanical Combination locks certified as per EN 1300 standards
- Overnight cash cover €375,000


(The above cash cover rating is recommended for the Business/Industrial Sector in an unsupported environment. However, this is an indicative overnight cash cover only and may vary across geographical locations, depending on statutory compliance requirements and local laws. Insurers may assign different cash cover values to the one recommended above.)

	MODEL	H24*	H35	H47S	H55S	H67S	H67			
Е	<u> </u>	790	1090	1390	1590	1890	1890			
Χ	<u></u>	690	690	690	690	940	940			
Т	<u> </u>	730	730	730	730	730	830			
I	↑ mm 🗐	600	900	1200	1400	1700	1700			
Ν	₩ mm 🗐	500	500	500	500	750	750			
Т	<u></u> mm ■	450	450	450	450	450	550			
DO	OR AT 90° (OD) (mm)	1357	1357	1357	1357	1607	1707			
DO	OR AT 180° (OW) (mm)	1271	1271	1271	1271	1771	1771			
DO	OR SWING RADIUS (S) (mm)	609	609	609	609	859	859			
V (J IN (Ltrs)	135	202	270	315	573	701			
Kg		725	929	1103	1226	1712	1899			
PR	ODUCT RATING	TESTED & CERTIFIED BY ECB.S - GERMANY								
BUI	RGLARY RESISTANCE	EN 1143 - 1, GRADE VI CD								
FIR	E RESISTANCE	NT 017 - 90 P,	ECB.S Germany							
STI	D. HANGING OF DOOR	RIGHT HUNG								
E		2	3	3	3	3	3			
STI	D. LOCKING"	02 Nos. EN 13	00 CLASS C, DOL	IBLE BITTED KEY	LOCKS.					

TOLERANCES ON WEIGHT - +/- 10%

BESPOKE SIZES AVAILABLE - PLEASE CHECK WITH US FOR AVAILABLE VARIATIONS IN DIMENSIONS.

MODEL H24 IS FIRE RATED AS 60P

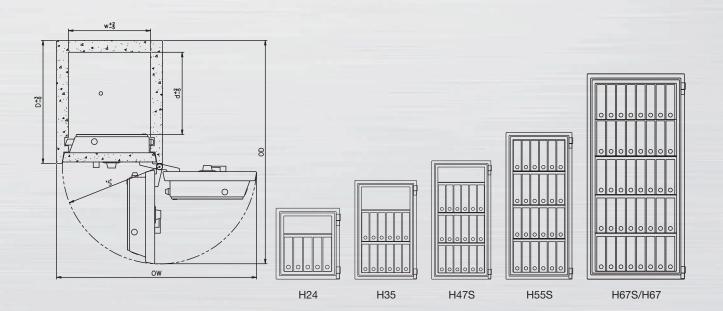

EUROCASH GUN SAFES - GRADE Ø / I











GUN SAFE-LITE

GUN SAFE-PRO

Features

- Certified by ECB.S Germany
- Available in Grades 0 / I as per EN 1143 1 standards
- Versatile design with a maximum storage capacity of 16 long weapons, multiple small arms, ammunition & gun accessories.
- Easy to maintain interiors, with removable and replaceable accessory and weapon holders
- Standard safe comes fitted with a high security Double Bitted Class A Key Lock as per EN 1300 standards
- Options available for Digital Electronic and Mechanical Combination locks certified as per EN 1300 standards

GUN SAFE - PRO

	MODEL	059 WS	M159 WS	D59 WS	T59 WS
Е	12, mm □	1600	1600	1630	1630
Χ	<u> </u>	610	610	640	640
Т	¼ mm □	520	520	553	553
	12, mm 🗐	1500	1500	1500	1500
Ν	<u>↓</u> mm	510	510	510	510
Т	₩ mm □	330	330	330	330
DC	OOR AT 90° (OD) (mm)	1098	1098	1162	1162
DC	OR AT 180° (OW) (mm)	1155	1155	1215	1215
DO	OR SWING RADIUS (S) (mm)	560	560	590	590
V	MIN (Ltrs)	252	252	252	252
ĺĸ	g	421	427	580	585
PR	ODUCT RATING	TESTED & CERTIFIED B	Y CNPP - FRANCE & ECI	B.S - GERMANY	
BU	RGLARY RESISTANCE	EN 1143 - 1, GRADE 0	EN 1143 - 1, GRADE 1	EN 1143 - 1, GRADE 2	EN 1143 - 1, GRADE 3
FIR	E RESISTANCE	NT 017 - 60 P, ECB.S G	ermany		
ST	D. HANGING OF DOOR		RIGHT HUNG		
INT	T. COFFER - VDMA A	1	1	1	1
GL	IN HOLDERS	7	7	7	7
		1	1	1	1
ST	D. LOCKING"	1 No. EN 1300 DOUBLE	BITTED KEY LOCK.		

TOLERANCES ON WEIGHT - +/- 10%

BESPOKE SIZES AVAILABLE - PLEASE CHECK WITH US FOR AVAILABLE VARIATIONS IN DIMENSIONS.

T2 OPTION AVAILABLE FOR ALL GRADES

GUN SAFE - LITE

_	MODEL	WS-047	WS-047WD	WS-057	WS-057WD1	M1 47	M1 47WD	M1 57	M1 57WD1
Е	14 mm 🗐	1250	1250	1500	1500	1250	1250	1500	1500
X	<u>↓</u> mm □	300	380	380	550	300	380	380	550
Т	<u> </u>	300	320	320	450	300	320	320	450
1	13 mm	1200	1200	1400	1400	1200	1200	1400	1400
Ν	<u>↓</u> mm	250	330	330	500	250	330	330	500
Т	¹ ∕ _{2, mm} □	190	210	210	340	190	210	210	340
DO	OR AT 90° (OD) (mm)	553	653	653	953	553	653	653	953
DO	OR AT 180° (OW) (mm)	518	678	678	1018	518	678	678	1018
DO	OR SWING RADIUS (S) (mm)	240	320	320	490	240	320	320	490
V (i)	IN (Ltrs)	57	83	100	246	57	83	100	246
Кg		130	177	181	264	130	177	181	264
PR	ODUCT RATING	CERTIFIED BY	ECB.S - GERMA	NY					
BU	RGLARY RESISTANCE	EN1143-1 GRADE 0	EN1143-1 GRADE 0	EN1143-1 GRADE 0	EN1143-1 GRADE 0	EN1143-1 GRADE I	EN1143-1 GRADE I	EN1143-1 GRADE I	EN1143-1 GRADE I
FIR	E RESISTANCE	NOT TESTED F	OR FIRE RESISTA	ANCE					
STI	D. HANGING OF DOOR		RIGHT	T HUNG					
GU	N HOLDERS	3	6	6	16	3	6	6	16
STI	D. LOCKING"	1 No. EN-1300	DOUBLE BITTE	D KEY LOCK.					

TRANSFER SAFE










Features

- Tested and certified by CNPP France, as per EN 1143 1, Grade II & III
- Contemporary light-weight design and construction
- Programmable door interlocking function facilitates bulk transfers in a highly secure environment
- Built-in features like door open alarm, audit trail, interlocking sequence programming available with the Door Interlocking Function Kit
- Standard safe comes fitted with a high security Double Bitted Class A / Class B Key Lock as per EN 1300 standards
- Door Interlocking Function Kit and electronics may be factory fitted on request or retro-fitted on site

			GRADE 2			GRADE 3	
	MODEL	TS D19W	TS D23	TS D28	TS T19W	TS T23	TS T28
Е	12, mm ■	615	715	830	615	715	830
X	12 mm 🗊	550	550	580	550	550	580
Т	2 → mm □	745	770	796	745	770	796
1	₩ mm i	485	585	700	485	585	700
N	₩ mm 🗐	420	420	450	420	420	450
Т	2 , mm ■	425	450	476	425	450	476
DOC	DR AT 90° (OD) (mm)	1264	1289	1345	1264	1289	1345
DOC	OR AT 180° (OW) (mm)	1034	1034	1094	1034	1034	1094
DOC	OR SWING RADIUS (S) (mm)	500	500	530	500	500	530
V (I)	IN (Ltrs)	87	111	150	87	111	150
Kg		324	370	435	330	376	440
PRO	DUCT RATING	TESTED & CER	RTIFIED BY CNPF	P - FRANCE			
BUF	RGLARY RESISTANCE	EN 1143 - 1, G	RADE 'II'		EN 1143 - 1, G	RADE 'III'	
FIRE	RESISTANCE	NONE					
STD	. HANGING OF DOOR	RIGHT AND LE	FT				
		1	1	1	1	1	1
STD	. LOCKING"	02 No. EN 1300	CLASS A / CLAS	SS B, DOUBLE E	BITTED KEY LOCK.		


TOLERANCES ON WEIGHT - +/- 10%

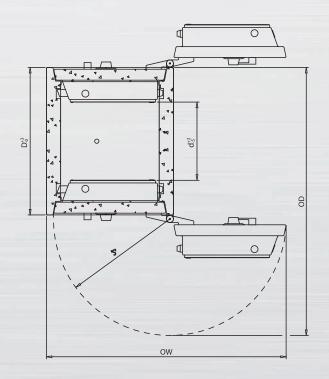

HIGH SECURITY



DEPOSITORY SAFES



EN 1143 - 2

STANDARDS FOR DEPOSIT SYSTEMS

Deposit systems are characterised by depository slots, which enable users to deposit cash & other valuables inside the safe without opening the safe door. The same slot however, makes the safe vulnerable to various forms of phishing and trapping attacks, and a poorly designed slot allows easy access to the contents inside.

The European Security standard for Deposit Systems EN 1143-2, explicitly incorporates testing for unauthorised access through the deposit input unit, apart from simulating other forms of torch, tool, gas and explosive test attacks on the safe.

All certified depository systems conforming to the European norms must adhere to the EN 1143 - 2 standards.

DEPOSITORY SAFE - GRADE 'D-I'












Features


- Tested and certified by CNPP France & ECB.S Germany, as per EN 1143 2, Grade 'D I'
- Contemporary light-weight design and construction
- The depository drawers are mounted on smooth heavy duty runners, which have been subjected to a life-cycle test of more than 100,000 operations
- The deposit system is capable of receiving envelopes and bags which are upto 50mm thick and with dimensions not exceeding a standard C5 envelope
- A rigorously tested anti-phishing system in the safe [as per the EN 1143 2 standards] ensures security of deposits at all times
- Access to the deposit unit is further restricted to authorised users only by a high security EN 1300 certified Class
 B Double Bitted Key Lock. As an added option, the High Security Key Lock may be replaced by a High Security
 Digital Electronic Lock with additional features like Multiple User and Manager Codes, Time Delay, Time Locking,
 Audit Control, etc. to monitor and control the drawer openings

	MODEL	M19W	M23	M28W	M35S	M43S	M51S
Е	1 2, mm □	747	847	962	1162	1362	1562
Χ	<u>₽</u> mm □	550	550	610	610	610	610
Т		615	615	715	615	615	615
I	<u> </u>	485	585	700	900	1100	1300
Ν	₽ mm 🗐	450	450	510	510	510	510
Т	1 2√ mm □	425	425	525	425	425	425
DOC	PR AT 90° (OD) (mm)	1133	1133	1293	1193	1193	1193
DOC	PR AT 180° (OW) (mm)	1035	1035	1155	1155	1155	1155
DOC	R SWING RADIUS (S) (mm)	500	500	560	560	560	560
V (I)	IN (Ltrs)	64	83	147	163	206	249
Kg		307	340	407	416	464	516
PRO	DUCT RATING	TESTED & CER	RTIFIED CNPP - F	RANCE & ECB.S	- GERMANY		
BUR	GLARY RESISTANCE	EN 1143 - 2, G	RADE 'D I'				
FIRE	RESISTANCE	NONE					
STD	. HANGING OF DOOR	RIGHT HUNG					
		1	1	1	1	1	1
STD	. LOCKING"	1 No. EN 1300	CLASS A, DOUB	LE BITTED KEY L	OCK.		

TOLERANCES ON WEIGHT - +/- 10%

BESPOKE MODELS AVAILABLE - PLEASE CHECK WITH US FOR AVAILABLE VARIATIONS IN DIMENSIONS.





33

DEPOSITORY SAFE - GRADE 'D-II'














Features

- Tested and certified by VdS Germany, CNPP France & ECB.S Germany, as per EN 1143 2, Grade 'D II'
- Contemporary light-weight design and construction
- The depository drawers are mounted on smooth heavy duty runners, which have been subjected to a life-cycle test of more than 100,000 operations
- The deposit system is capable of receiving envelopes and bags which are upto 50mm thick and with dimensions not exceeding a standard C5 envelope
- A rigorously tested anti-phishing system in the safe [as per the EN 1143 2 standards] ensures security of deposits at all times.
- Access to the deposit unit is further restricted to authorised users only by a high security EN 1300 certified Class B
 Double Bitted Key Lock. As an added option, the High Security Key Lock may be replaced by a High Security Digital
 Electronic Lock with additional features like Multiple User and Manager Codes, Time Delay, Time Locking, Audit
 Control, etc. to monitor and control the drawer openings

	MODEL	BS D19WD	BS D23W	BS D28WD	BS D35S	BS D43S	BS D51S
Е	1.5 mm ■	777	877	992	1192	1392	1592
Χ	₽mm 🗊	550	640	640	640	640	640
Т		533	648	648	648	648	648
ı	<u>12</u> , mm ■	485	585	700	900	1100	1300
Ν	₽ _{mm} □	420	510	510	510	510	510
Т	1 2₃ mm □	310	425	425	425	425	425
DOC	R AT 90° (OD) (mm)	920	1257	1257	1257	1257	1257
DOC	R AT 180° (OW) (mm)	1167	1215	1215	1215	1215	1215
DOC	R SWING RADIUS (S) (mm)	500	590	590	590	590	590
V (I)	IN (Ltrs)	63	127	152	195	238	281
Kg		321	449	483	514	574	629
PRO	DUCT RATING	TESTED & CER	RTIFIED BY VdS -	GERMANY, CNP	P - FRANCE & E	CB.S - GERMAN	Y
BUR	GLARY RESISTANCE	EN 1143 - 2, G	RADE 'D II'				
FIRE	RESISTANCE	NONE					
STD	HANGING OF DOOR		RIGHT HUNG	ì			
		1	1	1	1	1	1
STD	LOCKING"	1 No. EN 1300	CLASS A, DOUB	LE BITTED KEY LO	OCK.		

TOLERANCES ON WEIGHT - +/- 10%

BESPOKE MODELS AVAILABLE - PLEASE CHECK WITH US FOR AVAILABLE VARIATIONS IN DIMENSIONS.

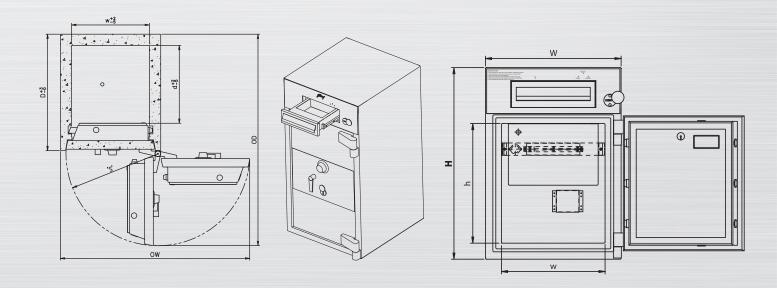

35

DEPOSITORY SAFE - GRADE 'D-III'












Features

- Tested and certified by CNPP France & ECB.S Germany, as per EN 1143 2, Grade 'D III'
- Contemporary light-weight design and construction
- The depository drawers are mounted on smooth heavy duty runners, which have been subjected to a life-cycle test of more than 100,000 operations
- The deposit system is capable of receiving envelopes and bags which are upto 50mm thick and with dimensions not exceeding a standard C5 envelope
- A rigorously tested anti-phishing system in the safe [as per the EN 1143 2 standards] ensures security of Deposits at all times.
- Access to the deposit unit is further restricted to authorised users only by a high security EN 1300 certified Class B
 Double Bitted Key Lock. As an added option, the High Security Key Lock may be replaced by a High Security Digital
 Electronic Lock with additional features like Multiple User and Manager Codes, Time Delay, Time Locking, Audit
 Control, etc. to monitor and control the drawer openings


	MODEL	BS T23W	BS T28WD	BS T35S	BS T43S	BS T51S				
Е	12 mm	877	992	1192	1392	1592				
Χ	<u> </u>	640	640	640	640	640				
Т	<u> </u>	648	648	648	648	648				
I	₩ mm 🗐	585	700	900	1100	1300				
Ν	1,2 mm □	510	510	510	510	510				
Т	1 mm ■	425	425	425	425	425				
DOC	DR AT 90° (OD) (mm)	1257	1257	1257	1257	1257				
DOC	DR AT 180° (OW) (mm)	1215	1215	1215	1215	1215				
DOC	OR SWING RADIUS (S) (mm)	590	590	590	590	590				
V (I)	IN (Ltrs)	127	151	195	238	281				
Kg		455	489	520	581	635				
PRC	DUCT RATING	TESTED & CERTIFIED BY CNPP - FRANCE & ECB.S - GERMANY								
BUR	GLARY RESISTANCE	EN 1143 - 2, GRADE 'D III'								
FIRE	RESISTANCE	NONE								
STD	. HANGING OF DOOR		RIGHT HUNG							
		1	1	1	1	1				
STD	. LOCKING"	1 No. EN 1300 CL	ASS B, DOUBLE BIT	TED KEY LOCK.						

TOLERANCES ON WEIGHT - +/- 10%

BESPOKE MODELS AVAILABLE - PLEASE CHECK WITH US FOR AVAILABLE VARIATIONS IN DIMENSIONS.







DEPOSITORY SAFE - GRADE 'D-V'










Features

- Tested and certified by CNPP France & ECB.S Germany, as per EN 1143 2, Grade 'D V'
- Contemporary light-weight design and construction
- The depository drawers are mounted on smooth heavy-duty runners, which have been subjected to a life cycle test of more than 100,000 operations
- The deposit system is capable of receiving envelopes and bags which are upto 50mm thick and with dimensions not exceeding a standard C5 envelope
- A rigorously tested motorised anti-phishing system in the safe [as per the EN 1143 2 standards] ensures security of deposits at all times
- Access to the deposit unit is further restricted to authorised users only by a high security EN 1300 certified Class B
 Double Bitted Key Lock. As an added option, the High Security Key Lock may be replaced by a High Security Digital
 Electronic Lock with additional features like Multiple User and Manager Codes, Time Delay, Time Locking, Audit
 Control etc. to monitor and control the drawer openings
- High level of electronics & intelligence integration The integrated electronics inside the safe allows for network
 connectivity on the built-in TCP/IP LAN port; multiple ports are also available for local printer, barcode scanning and
 GSM module connectivity

MODEL		BS 524	BS 535	BS 547S
E Mm		985	1285	1585
X Amm		690	690	690
T 2 mm		730	730	730
I A mm		600	900	1200
N Amm		500	500	500
T D _{mm}		450	450	450
DOOR AT 90° (OD) (n	nm)	1357	1357	1357
DOOR AT 180° (OW)	(mm)	1271	1271	1271
DOOR SWING RADIU	JS (S) (mm)	609	609	609
V() IN (Ltrs)		135	202	270
Kg		910	1114	1250
PRODUCT RATING	TESTE	D & CERTIFIED BY Vd	S- GERMANY & ECB.S - GERMAN'	Y
BURGLARY RESISTA	NCE EN 11	43 - 2, GRADE 'D V'		
FIRE RESISTANCE	NONE			
STD. HANGING OF	DOOR		RIGHT HUNG	
		1	1	1
STD. LOCKING"	02 No	s. EN 1300 CLASS B, D	OUBLE BITTED KEY LOCK.	

TOLERANCES ON WEIGHT - +/- 10%

BESPOKE MODELS AVAILABLE - PLEASE CHECK WITH US FOR AVAILABLE VARIATIONS IN DIMENSIONS.

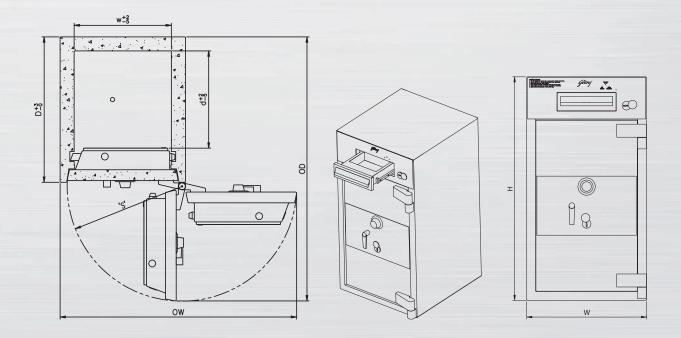

EN 1143 - 1, T2 PRODUCT TESTING IMAGES







BESPOKE SOLUTIONS - CERTIFIED SECURITY

We realise the need for offering customised solutions - we have a large range of certified Bespoke Safes, which cater to various needs for secure storage.

Features


- Certified Security even for Bespoke Safes
- Wide range and options available to provide tailor-made customer solutions
- Dedicated design team to cater to Bespoke Safes
- Design -> Prototype -> Delivery -> 8 weeks
- Satisfied Clients Food Chains, High Street Retailers, Pharmacies, Super Luxury Stores etc.

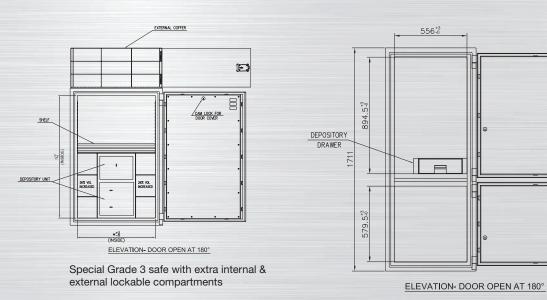



ELEVATION- DOOR OPEN AT 180°

Special safe for Cash Tills - Grade 3

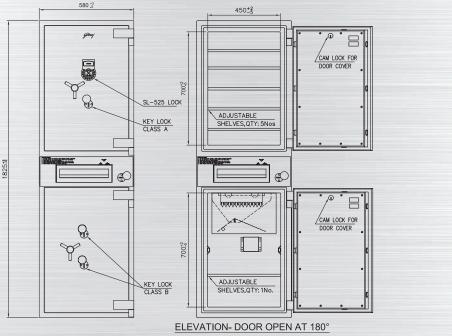

ELECTRONIC
COMB LOCK
LG - 66E


ELECTRONIC
COMB LOCK
LG - 66E

KEY LOCK

Special 2 Dr Grade 5 safe for

a renowned Food Chain

Special Depository Solution - Grade 'D 3' - safe on safe construction

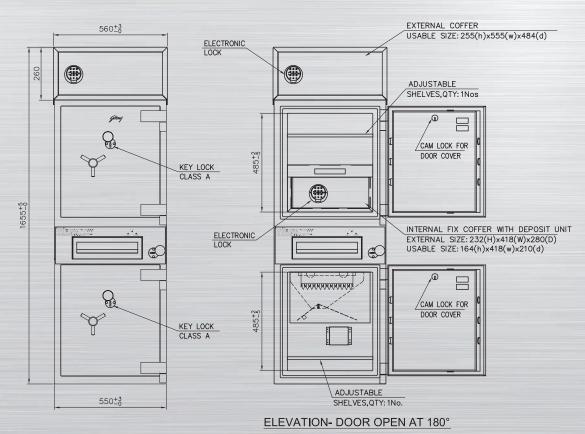


Special Depository Safe Grade 'D 3' - safe on safe construction for a renowned Hypermarket chain

MODERATE SECURITY



FIRE & BURGLARY RESISTANT SAFES



EN 14450

STANDARDS FOR SECURE SAFE CABINETS

The private home sector has witnessed the largest number of burglary attempts in Europe. Poorly designed, untested and uncertified products have been convenient picks for users in this segment mainly for price considerations. The need for certified security was recognised to prevent huge revenue losses to both the private individuals as well as the Insurance bodies.

The EN 14450 signaled a paradigm shift for this sector, from untested security to certified security. The standard replicates attacks by most of the tools used in domestic burglaries like power drills, crow-bars, grinders, etc., in laboratory conditions, so that the tested product may provide the required security level in a real life scenario.

Secure safe cabinets as per European norms must conform to the EN 14450 standards.

EUROLITE SAFES - VOMA B SERIES







Features


- Tested and certified by LPCB UK, as per EN 14450: S2 standards
- Conforms to VDMA B [as per VDMA 24992, version May 1995] standards*
- Light-weight construction designed for home and high-rise installation
- Fire Resistant In-fill material conforming to DIN: 4102-1 standards
- Two fixings in the rear and the base of the safe tested to 30KN pull force to ensure secure anchoring to the base or rear wall
- Fitted with an EN 1300 certified Double Bitted Key Lock as standard
- Overnight cash cover €5,000

(The above cash cover rating is recommended rating for Private Sector use. The recommended cover for jewellery will be usually 10 times the recommended cash cover. However, these are indicative overnight cash & jewellery covers only and may vary across geographical locations, depending on statutory compliance requirements and local laws. Insurers may assign different values to the one recommended above.)

* The VDMA 24992 Class A & B specification standards have been officially withdrawn w.e.f. 31 December, 2003.

MODEL	FS 10	FS 40	FS 50	FS 45	FS 65	FS 85			
E Mm	275	330	430	470	660	860			
X Z mm	325	450	360	490	490	490			
T Amm	325	380	400	410	410	410			
I Amm	200	255	355	385	575	775			
N Amm	250	375	285	375	375	375			
T Description	215	270	290	295	295	295			
DOOR AT 95° (OD) (mm)	545	725	655	782	782	782			
DOOR SWING RADIUS (S) (mm)	239	364	274	393	392	392			
IN (Ltrs)	11	26	29	42	63	85			
Kg	26	40	41	56	73	91			
PRODUCT RATING	TESTED & CERTIFIED BY LPCB - UK								
BURGLARY RESISTANCE	EN 14450 : S2 & VDMA - B								
FIRE RESISTANCE	NOT TESTED								
STD. HANGING OF DOOR		RIGHT HUNG							
	1	1	1	1	2	2			
STD. LOCKING**	1 No. EN 1300 CLASS A, DOUBLE BITTED KEY LOCK.								

*TOLERANCES ON WEIGHT - +/- 10%

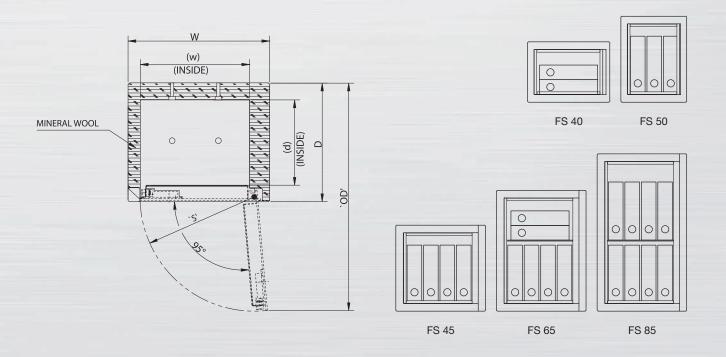

47

EUROLITE SAFES - S2 SERIES









Features

- Tested and certified by VdS Germany & ECB.S Germany, as per EN 14450: S2 standards
- Light-weight construction designed for home & high-rise installation
- A 3-way sturdy bolt-work & locking mechanism protected by special Drill Resistant Plates
- Fire Resistant In-fill material conforming to DIN: 4102-1 standards
- Two fixings in the rear and the base of the safe tested to 30KN pull force to ensure secure anchoring to the base or rear wall
- Fitted with an EN 1300 certified Double Bitted Key Lock as standard
- Overnight cash cover €20,000


(The above cash cover rating is recommended rating for Private Sector use. The recommended cover for jewellery will be usually 10 times the recommended cash cover. However, these are indicative overnight cash & jewellery covers only and may vary across geographical locations, depending on statutory compliance requirements and local laws. Insurers may assign different values to the one recommended above.)

* The VDMA 24992 Class A & B specification standards have been officially withdrawn w.e.f. 31 December, 2003.

	MODEL	FS 10*	FS 40	FS 40W	FS 50	FS 45	GKS 45	FS 65	GKS 65	FS 85
Е	123 mm 🗐	275	330	330	430	470	470	660	660	860
Χ	<u> </u>	325	450	490	360	490	490	490	490	490
Т	2 , mm ■	325	410	410	410	410	250	410	250	410
	12, mm □	200	255	255	355	385	385	575	575	775
Ν	12 mm □	250	375	415	285	403	403	403	403	403
Т	2 , mm □	225	300	300	300	300	135	300	135	300
DOO	R AT 95° (OD) (mm)	545	754	794	665	782	782	782	782	782
DOO	R SWING RADIUS (S) (mm)	239	364	404	274	392	392	392	392	392
V (I)	IN (Ltrs)	12	28	31	30	46	96 Keys	69	192 Keys	93
Кg		26	54	55	53	70	59	92	79	114
PRO	DUCT RATING	TESTED	& CERTIFIE	ED BY VdS 8	k ECB.S - G	ERMANY				
BUR	GLARY RESISTANCE	EN 14450	D: S2							
FIRE	RESISTANCE	NOT TES	TED							
STD.	HANGING OF DOOR		RIGHT HUNG							
		1	1		1	1		2		2
STD.	LOCKING**	1 No. EN	1300 CLAS	SS A, DOUB	_E BITTED I	KEY LOCK.				


^{*} TOLERANCES ON WEIGHT - +/- 10%

^{*} MODEL FS 10 IS CERTIFIED BY LPCB - UK AS PER EN 14450: S2 STANDARDS

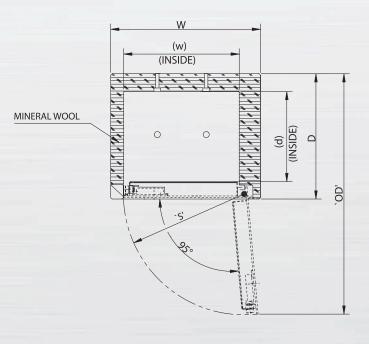



52 Key Sale - Wodel GKS

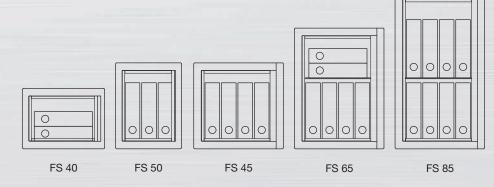

EUROLITE PRO SAFES - S2, 3Ø-P SERIES













Features


- Tested and Certified by CNPP France & ECB.S Germany, as per EN14450: S2 standards
- Light weight construction designed for Home & High rise installation
- A 3-way sturdy bolt-work & locking mechanism protected by special Drill Resistant plates
- Fire Resistant for 30 minutes Tested and certified as per EN 15659 LFS-30P standards
- Two Base or Rear Fixings tested to 30KN pull force; ensures secure anchoring of the safe
- Fitted with an EN 1300 certified double bitted Key lock as standard. Options for Electronic Lock.
- Overnight Cash Cover €20,000


(The above cash cover rating is recommended rating for Private Sector use. The recommended cover for Jewellery will be usually 10 times the However, these are indicative overnight cash & Jewellery covers only and may vary across geographical locations, depending on statutory compliance requirements and local laws. Insurers may assign different values to the one recommended above)

* The VDMA 24992 Class A & B specification standards have been officially withdrawn w.e.f 31st December, 2003

MODEL	PRO 40W	PRO 45	PRO 65	PRO 85	PRO 150					
E Amm	375	505	695	895	1150					
X Mm	523	523	523	523	523					
T 2.5 mm	470	470	470	470	470					
I Amm	255	385	575	775	1030					
N Amm	403	403	403	403	403					
T Amm	310	310	310	310	310					
DOOR AT 95° (OD) (mm)	893	893	893	893	893					
DOOR SWING RADIUS (S) (mm	423	423	423	423	423					
IN (Ltrs)	32	48	72	97	129					
Кg	65	80	102	124	152					
PRODUCT RATING	TESTED & CERTIFI	TESTED & CERTIFIED BY ECB.S - GERMANY								
BURGLARY RESISTANCE	EN 14450: S2									
FIRE RESISTANCE	LFS 15659 :30P, E	LFS 15659 :30P, EN 15659: LFS-30P								
STD. HANGING OF DOOR		RIGHT HUNG								
	1	1	2	2	3					
STD. LOCKING**	1 No. EN 1300 CL	ASS A, DOUBLE BIT	TED KEY LOCK.							

^{*} TOLERANCES ON WEIGHT - +/- 10%

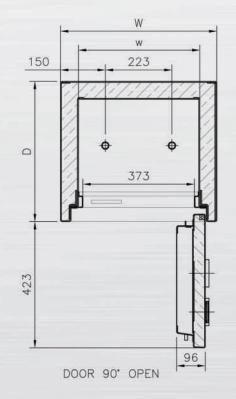



DEFENDER PRO - Ø SERIES - S2, 6Ø-P












Features


- Certified by ECB.S Germany, as per EN 14450: S2 standards
- Light-weight construction designed for home & high-rise installation
- A 3-way sturdy bolt-work & locking mechanism protected by special Drill Resistant Plates
- Certified by ECB.S Germany for Fire Resistance 60 P
- Two fixings in the safe base tested to 30KN pull force to ensure secure anchoring to the base*
- Fitted with an EN 1300 certified Double Bitted Key Lock as standard
- Overnight cash cover €20,000

(The above cash cover rating is recommended rating for Private Sector use. The recommended cover for jewellery will be usually 10 times the recommended cash cover. However, these are indicative overnight cash & jewellery covers only and may vary across geographical locations, depending on statutory compliance requirements and local laws. Insurers may assign different values to the one recommended above.)
*Option for rear-fixing available on request.

	MODEL - S2 '0' Series	014D	019D	023D	028WD	035S	043S	051S	059		
Е	12, mm 🗐	455	585	685	800	1000	1200	1400	1600		
Χ	<u> </u>	455	455	520	610	610	610	610	610		
Т	¼ mm □	500	500	520	520	520	520	520	520		
I	12, mm	355	485	585	700	900	1100	1300	1500		
Ν	<u>⊅</u> mm	355	355	420	510	510	510	510	510		
Т	¼ mm □	310	310	330	330	330	330	330	330		
DOC	OR AT 90° (OD) (mm)	923	923	1008	1098	1098	1098	1098	1098		
DOC	OR AT 180° (OW) (mm)	845	845	975	1155	1155	1155	1155	1155		
DOC	PR SWING RADIUS (S) (mm)	405	405	470	560	560	560	560	560		
V (I)	IN (Ltrs)	39	53	81	117	151	185	218	252		
Kg		124	148	165	207	245	285	328	421		
PRC	DUCT RATING	CERTIFIED BY ECB.S - GERMANY									
BUF	GLARY RESISTANCE	EN 14450:	S2	_ =							
FIRE	RESISTANCE	NT 017 - 6	60 P, ECB.S G	Germany							
STD	. HANGING OF DOOR		RIGHT HUNG								
		1	1	2	2	3	3	3	3		
	. LOCKING"	1 No. EN 1300 CLASS A, DOUBLE BITTED KEY LOCK,									

^{*}TOLERANCES ON WEIGHT - +/- 10%



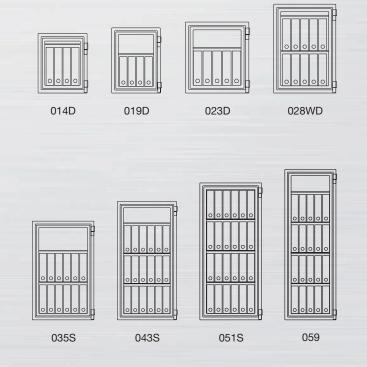


^{*}BESPOKE SIZES AVAILABLE - PLEASE CHECK WITH US FOR AVAILABLE VARIATIONS IN DIMENSIONS.

MODERATE SECURITY



FIRE RESISTANT CABINETS



STANDARDS FOR FIRE RESISTANCE OF SECURE STORAGE UNITS & CABINETS

Fire safety of your secure storage unit is of paramount importance. Fire has the destructive capability to ravage through your secure storage unit if it's not properly designed to provide fire protection. The EN 1047 and UL 72 standards have been perfected to replicate real life fire incidents in laboratory conditions. The units tested are subjected to multiple forms of endurance, explosion and impact tests to prove their capability to withstand high temperatures [sometimes exceeding 1000°C], sudden fires, and the impact of falling debris during a fire accident. The EN 15659 and NT 017 standards have been similarly designed to test fire endurance and the protection the cabinets may offer with increasing temperatures.

An uncertified Fire Resistant product is as good as an unprotected cabinet.

DOCUMENT SAFES - FR SERIES












Features

- Certified by ECB.S Germany
- Contemporary light-weight design and construction
- Unique snap shut mechanism in the door ensures ease of usage and high security to sudden fires
- A special tongue and groove construction between the door and door frame ensures higher resistance to industrial fires
- Option available for Digital Electronic Locks, certified as per EN 1300 standards
- Smooth powder coated oven baked structure finish ensures a very high level of product aesthetics

DIMENSIONS WITHOUT CASTORS & LEGS

	MODEL	FR 20V	FR 20H	FR 30V	FR 30H	FR 40V	FR 445	FR 560	FR 720	FR 1060	FR 1260	FR 1360
Е	△ mm 🗐	427	367	497	367	542	575	690	850	1190	1390	1490
Χ	△ mm 🗐	367	427	367	497	412	495	580	580	580	660	680
Τ	2 , mm □	424	424	484	484	484	537	587	587	587	587	587
I	₩ mm 🗐	320	260	390	260	435	445	560	720	1060	1260	1360
Ν	₩ mm 🗐	260	320	260	390	305	365	450	450	450	530	550
Т	¹ ✓ ₂ mm □	241	241	301	301	301	305	355	355	355	355	355
DOC	DR AT 90° (OD) (mm)	727	787	787	917	832	970	1105	1105	1105	1185	1205
DOC	OR AT 180° (OW) (mm)	701	821	701	961	791	930	1100	1100	1100	1260	1300
DOC	R SWING RADIUS (S) (mm)	342	402	342	472	387	450	535	535	535	615	635
V (I)	IN (Ltrs)	20	20	30	30	40	49	89	115	169	237	265
Kg		40	40	50	50	61	95	145	168	236	298	318
PRC	DUCT RATING	TESTE	D & CERT	ΓIFIED BY	ECB.S -	GERMAN	1Y					
BUF	GLARY RESISTANCE	NOT TI	ESTED		_		NOT TESTED		NOT TESTED			
FIRE	FIRE RESISTANCE NT 017 - 60P						NT 017	NT 017 - 120P		NT 017 - 90P		
STD	. HANGING OF DOOR	RIGHT HUNG										
		1	1	1	1	1	1	1	1	2	3	4
STD	STD. LOCKING" 1 No. GODREJ HIGH SECURITY KEY LOCK.											

^{*}TOLERANCES ON WEIGHT - +/- 10%

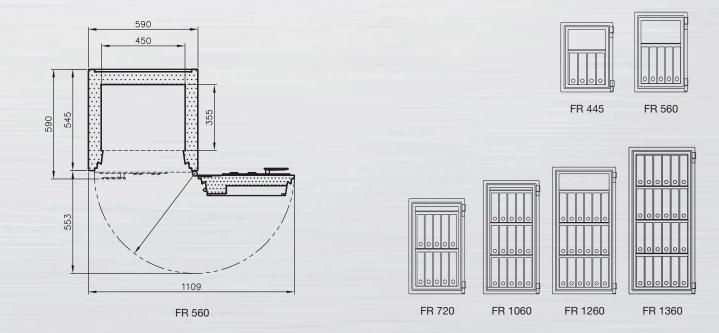

FIRE RESISTING FILING CABINET - FRFC 60 P








Features

- Certified by UL, USA for Fire and Impact Resistance as per UL-72, Class 350 standards
- Contemporary light-weight design and construction
- A special tongue and groove construction between the drawers and body frame offers higher Fire and Impact Resistance
- Heavy duty double extension telescopic slides for the individual drawers ensure easy movement and convenience
- A central lock on the top drawer controls the locking of individual drawers
- Individual drawers equipped with a special drawer isolation latch which may be used to isolate individual drawers from the central locking option
- Option available for Digital Electronic Locks, certified as per EN 1300 standards

	MODEL	4DR LD	3DR LD	2DR LD	4DR LW	3DR LW	2DR LW
Е	△ mm 🗐	1574	1196	818	1574	1196	818
X	₽mm 🗐	534	534	534	534	534	534
Т	1 2, mm ■	665	665	665	800	800	800
I	₩ mm 🗐	280	280	280	280	280	280
Ν	₩ mm 🗐	388	388	388	388	388	388
Т	Ĺ, mm 🗐	499	499	499	634	634	634
	Кg	380	285	190	410	310	210
	PRODUCT RATING	TESTED & CER	RTIFIED BY UL -	USA			
	BURGLARY RESISTANCE NOT TESTED				NOT TESTED		
FIRE RESISTANCE UL - 72, CLASS 350: 1 HR FIRE & IMPACT							
STD. LOCKING ** 1 No. GODREJ HIGH SECURITY KEY LOCK							

^{*}TOLERANCES ON WEIGHT - +/- 10%

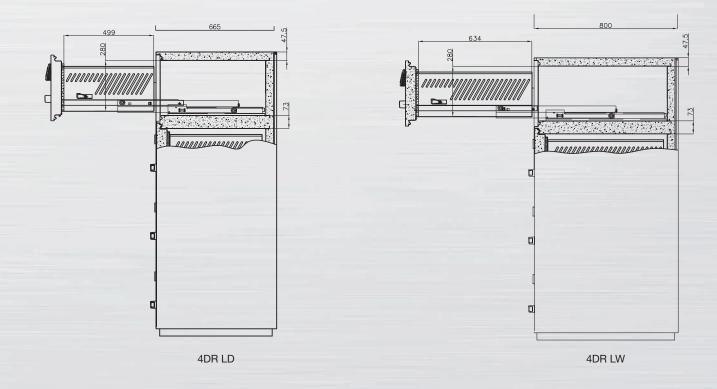

59

FIRE RESISTING FILING CABINET - FRFC 90 P








Features

- Certified by ECB.S Germany
- Contemporary light-weight design and construction
- A special tongue and groove construction between the drawers and body frame offers higher Fire and Impact Resistance
- Heavy duty double extension telescopic slides for the individual drawers ensure easy movement and convenience
- A central lock on the top drawer controls the locking of individual drawers
- Individual drawers equipped with a special drawer isolation latch which may be used to isolate individual drawers from the central locking option
- Option available for Digital Electronic Locks, certified as per EN 1300 standards

	MODEL	4DR LD	3DR LD	2DR LD	4DR LW	3DR LW	2DR LW
Е	₩ mm 🗐	1591	1209	827	1591	1209	827
X	<u> </u>	543	543	543	543	543	543
Т	1 2→ mm □	670	670	670	805	805	805
1	₩ mm 🗐	280	280	280	280	280	280
Ν	₽mm 🗐	388	388	388	388	388	388
Т	△ mm □	499	499	499	634	634	634
	κg	375	275	175	410	310	210
	PRODUCT RATING	TESTED & CER	RTIFIED BY ECB.	S - GERMANY			
	BURGLARY RESISTANCE NOT TESTED						
FIRE RESISTANCE NT 017 - 90 P, ECB.S Germany							
STD. LOCKING** 1 No. GODREJ HIGH SECURITY KEY LOCK							

^{*}TOLERANCES ON WEIGHT - +/- 10%

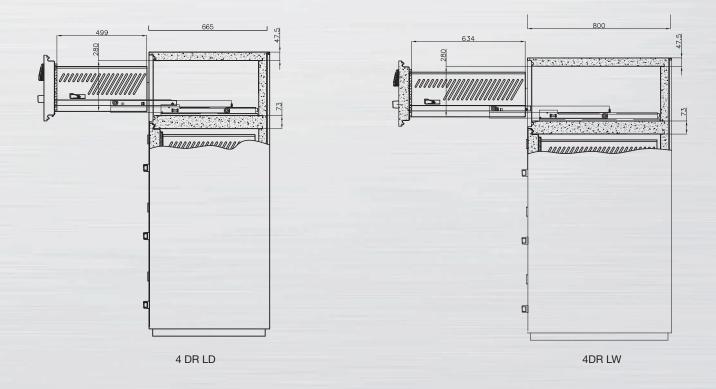

61

FIRE RESISTING FILING CABINET - FRFC 120 P








Features

- Certified by UL USA for Fire and Impact Resistance as per UL 72, Class 350 standards
- Contemporary light-weight design and construction
- A special tongue and groove construction between the drawers and body frame offers higher Fire and Impact Resistance
- Heavy duty double extension telescopic slides for the individual drawers ensure easy movement and convenience
- A central lock on the top drawer controls the locking of individual drawers
- Individual drawers equipped with a special drawer isolation latch which may be used to isolate individual drawers from the central locking option
- Option available for Digital Electronic Locks, certified as per EN 1300 standards

	MODEL	4DR LD	3DR LD	2DR LD	4DR	3DR	2DR
Е	<u> </u>	1608	1226	844	1608	1226	1226
Χ		560	560	560	560	560	560
Т	mm □	700	700	700	835	835	835
I	₩ mm 🗐	280	280	280	280	280	280
Ν	<u> </u>	388	388	388	388	388	388
Т		499	499	499	634	634	634
	Кg	440	340	240	490	390	275
	PRODUCT RATING	TESTED & CER	RTIFIED BY UL -	USA			
	BURGLARY RESISTANCE	CE NOT TESTED					
	FIRE RESISTANCE UL 72, CLASS 350: 2 HR FIRE & IMPACT						
	STD. LOCKING** 1 No. GODREJ HIGH SECURITY KEY LOCK						

^{*}TOLERANCES ON WEIGHT - +/- 10%

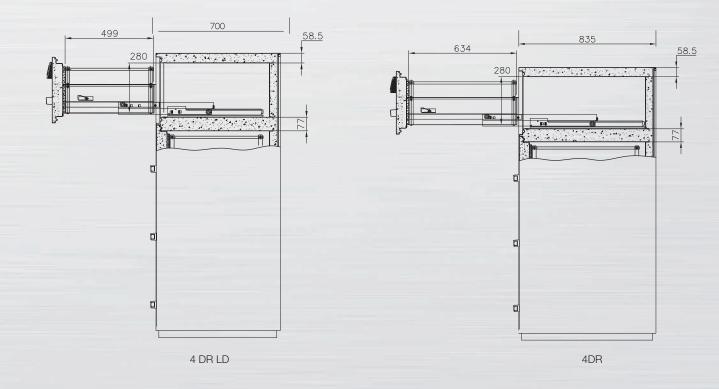

DATA CABINETS - DATALINE SERIES







Dataline 53L

Dataline M Cabinet

Features

- Certified by UL USA for Fire and Impact Resistance as per UL 72, Class 125 standards
- Contemporary light-weight design and construction
- Designed to protect computer media from fire
- Special humidity protection inside the cabinet ensures that relative humidity does not exceed 85%
- A High Security Key Lock ensures pilferage protection. Option of Digital Electronic Locks on Dataline M Cabinet
- Cabinets are equipped with special sliding trays on heavy duty rollers to manage convenient storage & use

	MODEL	53L	Dataline M-372L		
Е	12 mm	698	1875		
X	<u>Amm</u> □	555	850		
Т	mm □	661	760		
1	12→ mm 🗐	400	1510		
Ν	<u>P</u> mm≡	305	560		
Т	1> mm □	435	440		
in (Ltrs)		53	372		
L	Кg	155	865		
F	PRODUCT RATING	TESTED & CERTIFIED BY UL - USA (ONLY MODEL 53L HAS BEEN TESTED)			
BURGLARY RESISTANCE		NOT TESTED			
F	IRE RESISTANCE	UL 72, CLASS 125: 1 HR FIRE & IMPACT			
S	STD. LOCKING**	1 No. GODREJ HIGH SECURITY KEY LOCK			

^{*}TOLERANCES ON WEIGHT - +/- 10% *ONLY MODEL 53L IS UL CERTIFIED.

NX PRO RANGE

ELECTRONIC SAFE

In today's digital age, security too has kept pace. Godrej NX Pro Digital Home Safes designed for both, business and home use, always provides strong security for your valuables. The digital lock protects valuables with a unique 4 to 6 digit password. To add, it also has a non-volatile memory that remembers the password even when the batteries are replaced. The safe is smart enough to freeze after 4 consecutive wrong attempts.



Motorised Lock for Enhanced Safety



*Removable Shelves for Storing Taller Items



Mechanical Override Key & USB Access



Keypad Auto Freeze
After 3 Consecutive Attempt



Low Battery Indicator



Hotel Mode with Audit Trail



8L

Dimensions in mm (HxWxD)	200 x 300 x 200
Dimensions in inch (HxWxD)	7.8 x 11.8 x 7.8
Net weight (Kg.)	5
Volume (Ltr.)	8
Anchoring Provision	Yes

*Removable shelves not available.



15L

Dimensions in mm (HxWxD)	250 x 350 x 250
Dimensions in inch (HxWxD)	9.8 x 13.7 x 9.8
Net weight (Kg.)	9
Volume (Ltr.)	15
Anchoring Provision	Yes



251

Dimensions in mm (HxWxD)	200 x 420 x 370
Dimensions in inch (HxWxD)	7.8 x 16.5 x 14.5
Net weight (Kg.)	10
Volume (Ltr.)	25
Anchoring Provision	Yes

Anchoring Provision

*Removable shelves not available.



30L

Dimensions in mm (HxWxD)	320 x 400 x 320
Dimensions in inch (HxWxD)	12.6 x 15.7 x 12.6
Net weight (Kg.)	14
Volume (Ltr.)	30
Anchoring Provision	Yes



 Dimensions in mm (HxWxD)
 420 x 350 x 350

 Dimensions in inch (HxWxD)
 16.5 x 13.7 x 13.7

 Net weight (Kg.)
 16

 Volume (Ltr.)
 40

 Anchoring Provision
 Yes

40L

SAFE LOCKING OPTIONS



CAWI Optima Class A - 2648



Kaba President Class A - 71111



Kaba Praetor Class B



CAWI Primo Ro Entry



Gator RO



Gator R



Gator DR



Gator DF



Gator/Primor 2600



Gator 3000



Gator 5000



Gator 6000



Paxos Compact



Kaba Axessor USB Lock



INSYS Combination Lock 200



INSYS Q PAD / INSYS TWIN Lock




INSYS Q PAD / INSYS TWIN Lock



Dormakaba Cb90

ACCESSORIES







Inner Coffer



Sliding Tray



Sliding File Folder




Straight Handle



Star Handle

GLOSSARY



External Height




External Width



External Depth



Internal Height



Internal Width










Moderate Security

Shelves



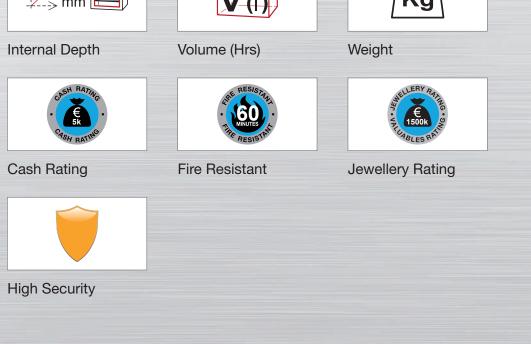

Business Card

71

NOTE

NC	DTE	NC	OTE CONTRACTOR OF THE CONTRACT
	Business Card		Business Card

NC	DTE	NC	OTE CONTRACTOR OF THE CONTRACT
	Business Card		Business Card

NC	DTE	NC	OTE CONTRACTOR OF THE CONTRACT
	Business Card		Business Card